



Cisco Nexus 7700 Supervisor 3E Module

Product overview

The Cisco Nexus[®] 7000 Series Switches are designed to meet the requirements of mission-critical data centers. These switches deliver exceptional availability, outstanding scalability, and the proven and comprehensive Cisco[®] NX-OS Software data center switching feature set.

The Cisco Nexus 7700 Switches are an extension of the Cisco Nexus 7000 Series modular switches. With more than 83 Terabits per second (Tbps) of overall switching capacity, the Cisco Nexus 7700 Switches support up to 768 native 10-Gbps ports, 384 40-Gbps ports, or 192 100-Gbps ports. This high system capacity is designed to meet the scalability requirements of the largest cloud environments.

The Cisco Nexus 7700 switches have operational and feature consistency with the existing Cisco Nexus 7000 Series Switches, using common system architecture, the same Application-Specific Integrated Circuit (ASIC) technology, and the same proven Cisco NX-OS Software releases.

The Cisco Nexus 7700 Supervisor 3E (Supervisor 3 Enhanced) Module (see Figure 1) scales the control-plane and data-plane services for the Cisco Nexus 7700 Switches in scalable data center networks. The enhanced supervisor module delivers control-plane and management functions. The supervisor controls the Layer 2 and 3 services, redundancy capabilities, configuration management, status monitoring, power and environmental management, and more. It provides centralized arbitration to the system fabric for all line cards.

The fully distributed forwarding architecture allows the supervisor to support transparent upgrades to I/O and fabric modules with greater forwarding capacity. Two supervisors are required for a fully redundant system, with one supervisor module running as the active device and the other in hot-standby mode, providing exceptional high-availability features such as stateful switchover and In-Service Software Upgrade (ISSU) on mission-critical data center-class products.

Figure 1. Cisco Nexus 7700 Supervisor 3E Module



The Cisco Nexus 7700 Supervisor 3E Module is built with a newer Intel processor with more on-board memory that offers better control-plane performance and scalability.

Features and benefits

The Cisco Nexus 7700 Supervisor 3E Module delivers a comprehensive set of features to address the needs of the most demanding data center deployments:

- Enhanced Arbitration Logic
 - Enables higher throughput per port for select I/O modules
- Continuous system operation
 - Active and standby supervisors
 - Segmented and redundant out-of-band provisioning and management paths
 - Virtualization of the management plane
 - Integrated diagnostics and protocol decoding with an embedded control-plane packet analyzer
- Upgradeable architecture
 - Separate supervisor and fabric modules in a distributed architecture enables independent upgrades of supervisor and fabric modules
- Superior operating efficiency
 - System locator and beacon LEDs for simplified operations (see Figure 2)
 - On-Board Failure Logging (OBFL) flash memory

Figure 2. Cisco Nexus 7700 Supervisor 3E Module connectivity and indicators

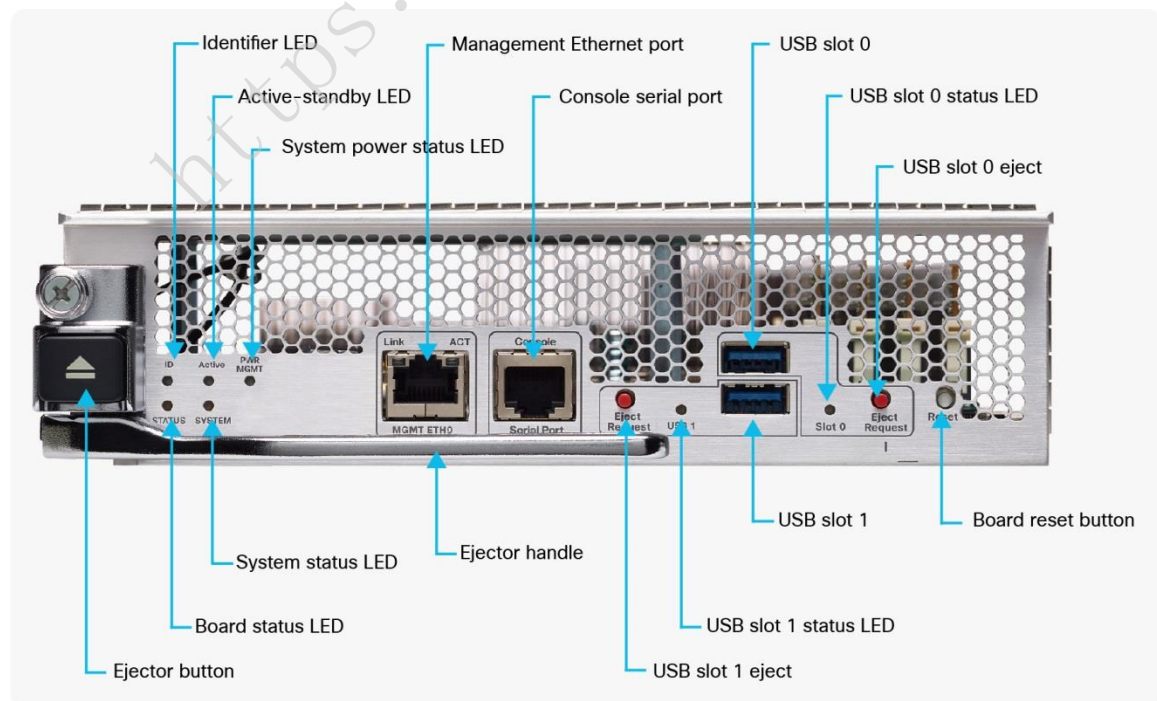


Table 1 summarizes the features and benefits of the Cisco Nexus 7700 Supervisor 3E Module.

Table 1. Features and benefits

| Feature | Benefit |
|--|--|
| High availability | Two supervisor modules operate in active and standby modes with stateful supervisor failover to enhance total system availability. |
| Resilient dedicated connectivity to each fabric and I/O module slot | Dual redundant Ethernet out-of-band channels to each module and fabric provide resilience for communication between the control plane and line-card processors. |
| Centralized arbiter | Active-active control of the flow of traffic through the switch fabric helps ensure transparent switchover with no data loss. |
| Virtual Output Queue (VOQ) | A Quality-of-Service(QoS)-aware lossless fabric avoids the problems associated with head-of-line blocking. |
| Embedded packet analyzer | An advanced integrated troubleshooting tool reduces the need for dedicated protocol analyzers and provides faster resolution of control-plane problems. |
| Front-panel LEDs | LEDs provide visible indicators of the supervisor ID, active or standby status, power management, and activity on the compact flash drive. |
| Identification LED | Using the beacon feature, the administrator can clearly identify the chassis and supervisor module. |
| USB ports | Ports enable access to USB flash memory devices for software image loading and recovery. |
| SSD | 240 GB on board SSD, which provides storage for firmware, log files, etc. |
| CPU shares | CPU shares enable the allocation of specific amounts of the switch's CPU processing to a specific VDC. This feature enables prioritization of VDCs, helps ensure that critical VDCs have access to the CPU, and prevents lower-priority VDCs from negatively affecting higher-priority VDCs. |

Supervisor redundancy

Two supervisor modules are required in a Cisco Nexus 7700 switching system for high availability with active-standby redundancy, with one supervisor module operationally active and the standby device serving as a “hot” backup. Both supervisors in the redundancy configuration must be of the same type.

Advanced diagnostics and troubleshooting tools

Management of large-scale data center networks requires proactive management tools to verify connectivity and mechanisms for capturing and analyzing traffic. The Cisco Nexus 7700 Switches Supervisor 3E Module incorporates advanced analysis and debugging capabilities. The Power-On Self-Test (POST) and Cisco Generic Online Diagnostics (GOLD) provide proactive health monitoring both at startup and during system operation. The supervisor module provides a built-in packet capture and protocol-decoding tool that allows analysis of control-plane traffic to improve network planning, provide faster operation response times to events, and reduce operating costs.

Product specifications

Table 2 lists the specifications of the Cisco Nexus 7700 enhanced supervisor module.

Table 2. Technical specifications

| | |
|----------------------------|--|
| Processor | Intel® Broadwell-DE |
| Number of cores | 8 |
| Speed | 2.0 GHz |
| Kernel | 64-bit |
| Cisco NX-OS release | Cisco NX-OS Software Release 8.3 and later |
| Memory | 64 GB (DDR4) 240 GB SSD 4 GB eUSB NVRAM 2-MB battery backup |

| | |
|--------------------------|---|
| Removable storage | 2 external USB memory slots: <ul style="list-style-type: none"> • Slot 0 • USB 1 |
| Power | Typical: 110 watts (W) Maximum: 150 W |
| Dimensions | <ul style="list-style-type: none"> • H x W x D: 2.04 x 7.94 x 21.85 in. (5.18 x 20.17 x 55.5 cm) • Weight: 7.72 lb (3.5 kg) |

Table 3 provides the product and environmental specifications for the Cisco Nexus 7700 enhanced supervisor module.

Table 3. Product and Environmental specifications

| Item | Specifications |
|---------------------------------|---|
| Product compatibility | Cisco Nexus 7700 Series Switches |
| Redundancy | 2 supervisor modules of the same type are required per system for high availability. |
| Interfaces | <ul style="list-style-type: none"> • Supervisor management port: 10/100/1000-Mbps Ethernet port • Console serial port: RJ45 connector • 2 USB ports: (Slot 0 and USB 1) for peripheral devices |
| MIBs | Simple Network Management Protocol (SNMP) supported; see Cisco NX-OS Software release notes for information about specific MIB support |
| Network management | Cisco Data Center Network Manager (DCNM) |
| Programming interfaces | <ul style="list-style-type: none"> • XML • Scriptable Command-Line Interface (CLI) • Cisco DCNM web services • Python • Tool Command Language (TCL) • Cisco IOS® Embedded Event Manager (EEM) • Cisco ONE™ (Open Network Environment) Platform Kit (onePK) • OpenFlow |
| Environmental conditions | <ul style="list-style-type: none"> • Operating temperature: 32 to 104°F (0 to 40°C) • Relative humidity (operational): 5 to 90%, noncondensing • Storage temperature: - 40 to 158°F (- 40 to 70°C) • Relative humidity (nonoperational): 5 to 95%, noncondensing |
| Regulatory compliance | <ul style="list-style-type: none"> • EMC compliance • FCC Part 15 (CFR 47) (USA) Class A • ICES-003 (Canada) Class A • EN55022 (Europe) Class A • CISPR22 (International) Class A • AS/NZS CISPR22 (Australia and New Zealand) Class A • VCCI (Japan) Class A • KN22 (Korea) Class A • CNS13438 (Taiwan) Class A • CISPR24 • EN55024 • EN50082-1 • EN61000-3-2 • EN61000-3-3 • EN61000-6-1 • EN300 386 • EN61000-4-5 |

| Item | Specifications |
|--------------------------------|---|
| Environmental standards | <ul style="list-style-type: none"> • NEBS criteria levels <ul style="list-style-type: none"> ◦ SR-3580 NEBS Level 3 (GR-63-CORE and GR-1089-CORE) • Verizon NEBS compliance VZ.TPR.9203 - Data Center • Century Link NEBS requirements • ATT NEBS requirements <ul style="list-style-type: none"> ◦ ATT TP76200 Carrier Grade Level 1 • ETSI* <ul style="list-style-type: none"> ◦ ETSI 300 019-2-1, Class 1.2 Storage ◦ ETSI 300 019-2-2, Class 2.3 Transportation ◦ ETSI 300 019-2-3, Class 3.2 Stationary Use • Validation in progress |
| Safety | <ul style="list-style-type: none"> • UL/CSA/IEC/EN 60950-1 • AS/NZS 60950 |

Warranty

Cisco Nexus 7700 Switches come with the standard Cisco 1-year limited hardware warranty.

Ordering information

To place an order, visit the [Cisco Ordering homepage](#). To download software, visit the _____

Table 4. Ordering information

| Product name | Part number |
|--|--------------|
| Cisco Nexus 7700 Switch Supervisor 3 Enhanced Module | N77-SUP3E |
| Cisco Nexus 7700 Switch Supervisor 3 Enhanced Module Spare | N77-SUP3E= |
| Cisco Nexus 7700 - USB Flash Memory - 2 GB (Flash) | N77-USB-2GB |
| Cisco Nexus 7700 - USB Flash Memory - 2 GB (Flash) Spare | N77-USB-2GB= |

Service and support

Cisco offers a wide range of services to help accelerate your success in deploying and optimizing the Cisco Nexus 7700 Switches in your data center. Our innovative services are delivered through a unique combination of people, processes, tools, and partners, and are focused on helping you increase operation efficiency and improve your data center network. Cisco Advanced Services uses an architecture-led approach to help you align your data center infrastructure with your business goals and provide long-term value. Cisco SMARTnet™ Service helps you resolve mission-critical problems with direct access at any time to Cisco network experts and award-winning resources. With this service, you can take advantage of the Cisco Smart Call Home service, which offers proactive diagnostics and real-time alerts on your Cisco Nexus 7700 Switches. Spanning the entire network lifecycle, Cisco Services helps increase investment protection, optimize network operations, support migration, and strengthen your IT expertise. For more information about Cisco Data Center Services, visit <https://www.cisco.com/go/dcservices>.

Cisco Capital

Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more](#).

For more information

For more information about the Cisco Nexus 7700 Switches, visit the product homepage

<https://www.cisco.com/go/nexus7000> or contact your local account representative.

<https://www.jhj.cn>




Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

 Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)