

# Cisco Catalyst 9400 Series Switch Line Cards

<https://www.jhj.cn>

# Contents

Product overview	3
Line card specification	4
<b>Cisco Catalyst 9400 Series switch line cards</b>	<b>5</b>
C9400-LC-48HX	5
C9400-LC-48UX	6
C9400-LC-48HN	8
C9400-LC-48H	9
C9400-LC-48U	10
C9400-LC-48P	12
C9400-LC-48T	13
C9400-LC-48XS	14
C9400-LC-24XS	15
C9400-LC-48S	16
C9400-LC-24S	18
Power over Ethernet	20
Energy Efficient Ethernet	20
Features and benefits	21
<b>Functional transparency</b>	<b>21</b>
<b>Modular versatility</b>	<b>21</b>
Optics	21
Product specifications	22
<b>Standards, technologies, environmental, and other line card features</b>	<b>22</b>
Power and MTBF information	23
Ordering information	24
Warranty	25
<b>Cisco Enhanced Limited Lifetime Hardware Warranty</b>	<b>25</b>
Cisco Services	25
Product sustainability	26
Cisco Capital	26
Document history	27

---

## Product overview

### Built for Security, IoT, Mobility, and Cloud

Cisco® Catalyst® 9400 Series switches are Cisco's lead modular enterprise access switching platform and as part of the Catalyst 9000 family, are built to transform your network to handle a hybrid world where the workplace is anywhere, endpoints could be anything, and applications are hosted all over the place. The Catalyst 9400 Series, including the new Catalyst 9400 SUP-2/2XL supervisor and line cards, continues to shape the future with continued innovation that helps you reimagine connections, reinforce security and redefine the experience for your hybrid workforce big and small.

Advanced persistent security threats, the exponential growth of the Internet of Things (IoT) devices, mobility everywhere and cloud adoption require a network fabric that integrates advanced hardware and software innovations to automate, secure, and simplify customer networks. The goal of this network fabric is to enable customer revenue growth by accelerating business service rollout.

The Cisco® Digital Network Architecture (Cisco DNA) with Software-Defined Access (SD-Access) is the most advanced network fabric to power customer business. Cisco DNA is an open and extensible, software-driven architecture that accelerates and simplifies your enterprise network operations. The programmable architecture frees your IT staff from time-consuming, repetitive network configuration tasks so they can focus instead on innovation that positively transforms your business. SD-Access enables policy-based automation from edge to cloud with foundational capabilities that include:

- Simplified device deployment
- Unified management of wired and wireless networks
- Network virtualization and segmentation
- Group-based policies
- Context-based analytics

Cisco Catalyst® 9400 Series switches are Cisco's lead modular enterprise switching access and aggregation platform built for security, IoT and cloud. This switch series forms the foundational building blocks for SD-Access, Cisco's leading enterprise architecture. Catalyst 9400 Series switches provide unparalleled investment protection with a chassis architecture that supports up to 9 Tbps of system bandwidth and unmatched power delivery with high density IEEE 802.3bt PoE (60W and 90W). Redundancy is now table stakes across the portfolio. Cisco Catalyst 9400 Series switches deliver state-of-the-art High Availability (HA) with capabilities like SSO/NSF, uplink resiliency, N+1/N+N redundancy for power supplies. Catalyst 9400 Series switches are enterprise optimized with an innovative dual-serviceable fan tray design, side to side airflow and is closet-friendly with ~16 in. depth. A single system can scale up to 384 access ports with your choice of 10G, 5G and 2.5G multigigabit copper, 1G Copper, Cisco UPOE®, Cisco UPOE and PoE+ options and up to 384 ports of 10G Fiber and 1G Fiber options. The platform also supports advanced routing and infrastructure services, SD-Access capabilities, and network system virtualization. These features enable optional placement of the platform in the core and aggregation layers of small to medium-sized campus environments.

## Line card specification

Table 1 summarizes port specifications for the line cards.

**Table 1.** Port information for line cards

Line card	Number of ports	Port speed	Port type	Cisco Catalyst 9400 Series switch min/max ports		
				C9404R	C9407R	C9410R
<b>C9400-LC-48HX</b>	48	10GBASE-T, 5G/2.5G multigigabit, 1000M/100M	RJ-45 UPOE+ IEEE 802.3bt, IEEE 802.3at, IEEE 802.3af, Cisco pre-standard	48/96	48/240 <sup>1</sup>	48/384 <sup>2</sup>
<b>C9400-LC-48HN</b>	48	5G/2.5G multigigabit, 1000M/100M	RJ-45 UPOE+ IEEE 802.3bt, IEEE 802.3at, IEEE 802.3af, Cisco pre-standard	48/96	48/240 <sup>3</sup>	48/384 <sup>4</sup>
<b>C9400-LC-48H</b>	48	10/100/1000M	RJ-45 UPOE+ IEEE 802.3bt, IEEE 802.3at, IEEE 802.3af, Cisco pre-standard	48/96	48/240	48/384 <sup>5</sup>
<b>C9400-LC-48UX</b>	48	24 Multigigabit 100/1000 Mbps 2.5/5 Gbps 10GBASE-T ports and 24 10/100/1000 ports	RJ-45 UPOE IEEE 802.3at, IEEE 802.3af, Cisco pre-standard	48/96	48/240	48/384
<b>C9400-LC-48U</b>	48	10/100/1000M	RJ-45 UPOE IEEE 802.3at, IEEE 802.3af, Cisco pre-standard	48/96	48/240	48/384
<b>C9400-LC-48T</b>	48	10/100/1000M	RJ-45	48/96	48/240	48/384
<b>C9400-LC-48XS</b>	48	10 GE or 1 GE	SFP+/SFP	48/96	48/240	48/384
<b>C9400-LC-24XS</b>	24	10 GE or 1 GE	SFP+/SFP	24/48	24/120	24/192
<b>C9400-LC-48P</b>	48	10/100/1000M	RJ-45 POE+ IEEE 802.3at, IEEE 802.3af, Cisco pre-standard	48/96	48/240	48/384

Line card	Number of ports	Port speed	Port type	Cisco Catalyst 9400 Series switch min/max ports		
				C9404R	C9407R	C9410R
<b>C9400-LC-24S</b>	24	1 GE	SFP	24/48	24/120	24/192
<b>C9400-LC-48S</b>	48	1 GE	SFP	48/96	48/240	48/384

<sup>1</sup> With max power 226 ports can supply full 90W on all ports concurrently

<sup>2</sup> With max power 224 ports can supply full 90W on all ports concurrently

<sup>3</sup> With max power 231 ports for C9400X-SUP-2/2XL can supply full 90W on all ports concurrently

<sup>4</sup> With max power 240 ports for C9400-SUP-1/1XL/1XL-Y and 229 ports for C9400X-SUP-2/2XL can supply full 90W on all ports concurrently


<sup>5</sup> With max power 260 ports for C9400-SUP-1/1XL/1XL-Y and 240 ports for C9400X-SUP-2/2XL can supply full 90W on all ports concurrently

## Cisco Catalyst 9400 Series switch line cards

Cisco Catalyst 9400 Series switches offer Cisco 5G and 10G Multigigabit Ethernet technology, Cisco UPOE, data, 1G and 10G fiber line cards.

### C9400-LC-48HX

### Cisco Catalyst 9400 Series Switch 10G multigigabit UPOE+ Line Card

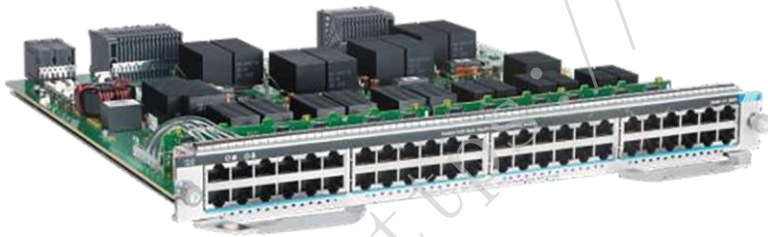

**Figure 1.**

Cisco Catalyst 9400 Series 48-Port 10G mGig (RJ-45) UPOE+ Line Card (C9400-LC-48HX)

The Catalyst 9400 Series switch 48 port multigigabit UPOE+ line card supports 10GBASET, 5/2.5Gbps, 1000/100Mbps, Cisco UPOE<sup>®</sup>+, Cisco UPOE, PoE+ and PoE. Designed for higher bandwidth PoE powered Wi-Fi 6/6E deployment, IEEE 802.3bt compliant 48-port mGig 90W UPOE+ line card provides line-rate data and power over a single cable to power other devices like digital signage, security cameras, thermal cameras, LED lighting fixtures and large display screens. Cisco UPOE+ offers reduced cabling and installation costs without need for permits, device daisy-chaining applications that require higher power draw, uninterrupted power and data using dual supervisors, real-time device information and centralized management and remote control, faster and flexible device installation, where devices can be positioned in practical location instead of proximity to electrical outlets. Additionally, these line cards provide advanced energy management through standards-based Energy Efficient Ethernet and lowest thermal dissipation per watt of energy sourced.

## Features


- 48 ports nonblocking 10GBASET, 5/2.5G multigigabit, 1000/100M module (RJ-45)
- Supported on Cisco IOS XE Software Release 17.8 or later
- Cisco UPOE+ is enabled, capable of up to 90W on all ports in the line card
- Energy Efficient Ethernet 802.3az
- IEEE 802.3bt/af/at and Cisco pre-standard PoE
- IEEE 802.1AE (MACsec-256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support up to 9216 bytes
- Ideal for Wi-Fi 6/6E campus and branch applications requiring enhanced performance

**Table 2.** Bandwidth per slot by chassis type for C9400-LC-48HX line card

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-2XL (C9400X-SUP-2XL)</b>	Bandwidth per slot	480 Gbps	480 Gbps	480 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2 (C9400X-SUP-2)</b>	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	2:1	2:1	2:1

## C9400-LC-48UX

### Cisco Catalyst 9400 Series 48-Port UPOE® with 24-ports Multigigabit and 24-ports 10/100/1000 Mbps

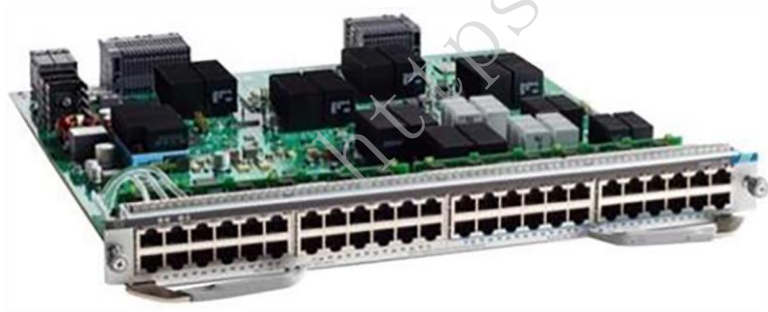

**Figure 2.**

Cisco Catalyst 9400 Series 48-Port UPOE® Line Card (C9400-LC-48UX) with 24 Multigigabit Ports and 24 10/100/1000 Mbps Ports

The Cisco Catalyst 9400 Series 48-Port UPOE line card with 24 port Multigigabit ports and 24 10/100/1000 Mbps Ports provides the solution you need to support newer applications such as 802.11ac Wave 2 access points with your existing Ethernet access cabling. Multigigabit switch ports allow automatic negotiation of 100- Mbps, 1-Gbps, 2.5-Gbps, and 5-Gbps speeds on existing Category 5e and 6 cable, and all the way up to 10- Gbps speeds over Category 6 cabling. The Multigigabit Ethernet line card supports Power over Ethernet (PoE), PoE Plus (PoE+), and Cisco Universal PoE (Cisco UPOE) to deliver 15W, 30W, or 60W to the access point. Cisco remains the only vendor that can provide 60W to power downstream devices in a next-generation workspace. So you can power more devices—IP phones, IPTVs, surveillance cameras, virtual desktop clients, and many others—without having to install extra wall or ceiling circuits, while taking advantage of standards-based Energy Efficient Ethernet. You can now realize all of these Cisco UPOE benefits in a single switching platform, while enabling Multigigabit Wi-Fi speeds.

## Features

- 48 ports with 24 Multigigabit ports and 24 10/100/1000 Mbps ports
- Speeds of 100/1000 Mbps, 2.5/5 Gbps, and 10GBASE-T on the Multigigabit ports and 10/100/1000 Mbps on the other ports
- Nonblocking up to 1000 Mbps on all ports
- RJ-45 interface on all ports
- Supported on Cisco IOS® XE Software Release 16.6.2 or later
- Cisco UPOE: Capable of up to 60W on all ports in the line card
- Energy Efficient Ethernet 802.3az on all 10/100/1000 ports
- IEEE 802.3bz, 802.3an Multigigabit Ethernet standard on the Multigigabit ports
- IEEE 802.3af/at and Cisco pre-standard PoE
- IEEE 802.1ae (MACsec-256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support (up to 9216 bytes)
- Enterprise and commercial: Designed to power next-generation IP phones, wireless access points, wireless base stations, video cameras, virtual desktop clients, and other PoE/Cisco UPOE devices
- Support for campus and branch applications requiring enhanced performance for large file transfers and network backups

**Table 3.** Bandwidth per slot by chassis for C9400-LC-48UX line card


Supervisor <sup>1</sup>		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-1 (C9400-SUP-1)</b>	Bandwidth per slot	80 Gbps	80 Gbps	80 Gbps
	Oversubscription	3.3:1	3.3:1	3.3:1
<b>C9400 Supervisor Engine-1XL (C9400-SUP-1XL)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1.1:1	2.2:1	3.3:1
<b>C9400 Supervisor Engine-1XL-Y</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps

Supervisor <sup>1</sup>		Chassis C9404R	Chassis C9407R	Chassis C9410R
(C9400-SUP-1XL-Y)	Oversubscription	1.1:1	2.2:1	3.3:1
C9400 Supervisor Engine-2XL (C9400X-SUP-2XL)	Bandwidth per slot	480 Gbps <sup>1</sup>	480 Gbps <sup>1</sup>	480 Gbps <sup>1</sup>
	Oversubscription	1.1:1	1.1:1	1.1:1
C9400 Supervisor Engine-2 (C9400X-SUP-2)	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	1.1:1	1.1:1	1.1:1

<sup>1</sup>Supervisor 2 provides 480 Gbps per slot, but this LC can only make use of 240 Gbps

## C9400-LC-48HN

### Cisco Catalyst 9400 Series Switch 5G multigigabit UPOE+ Line Card

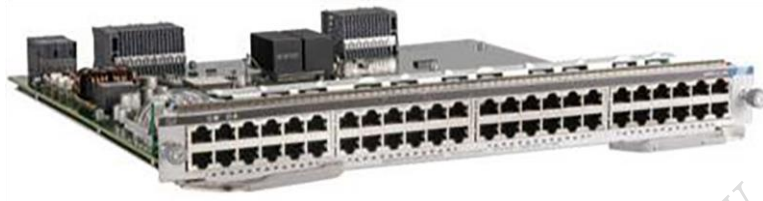

**Figure 3.**

Cisco Catalyst 9400 Series 48-Port 5G multigigabit (RJ-45) UPOE+ Line Card (C9400-LC-48HN)

The Catalyst 9400 Series switch 48 port multigigabit UPOE+ line card supports 5/2.5 G multigigabit, 1000M/100M, Cisco UPOE<sup>®</sup>+, Cisco UPOE, PoE+ and PoE. Designed for higher bandwidth PoE powered Wi-Fi 6/6E deployment, IEEE 802.3bt compliant 48-port mGig 90W UPOE+ line card provides line-rate data and power over a single cable to power other devices like digital signage, security cameras, thermal cameras with PTZ features, LED lighting fixtures and large display screens. Cisco UPOE+ offers reduced cabling and installation costs without need for permits, device daisy-chaining applications that require higher power draw, uninterrupted power and data using dual supervisors, real-time device information and centralized management and remote control, faster and flexible device installation, where devices can be positioned in practical location instead of proximity to electrical outlets. Additionally, these line cards provide advanced energy management through standards-based Energy Efficient Ethernet and lowest thermal dissipation per watt of energy sourced.

### Features


- 48 ports nonblocking 5/2.5G multigigabit, 1000/100M module (RJ-45)
- Supported on Cisco IOS XE Software Release 17.5 or later
- Cisco UPOE+ is enabled, capable of up to 90W on all ports in the line card
- Energy Efficient Ethernet 802.3az
- IEEE 802.3bt/af/at and Cisco pre-standard PoE
- IEEE 802.1AE (MACsec-256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support up to 9216 bytes
- Ideal for Wi-Fi 6/6E campus and branch applications requiring enhanced performance

**Table 4.** Bandwidth per slot by chassis for C9400-LC-48HN line card

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-1 (C9400-SUP-1)</b>	Bandwidth per slot	80 Gbps	80 Gbps	80 Gbps
	Oversubscription	3:1	3:1	3:1
<b>C9400 Supervisor Engine-1XL (C9400-SUP-1XL)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	2:1	3:1
<b>C9400 Supervisor Engine-1XL-Y (C9400-SUP-1XL-Y)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	2:1	3:1
<b>C9400 Supervisor Engine-2XL (C9400X-SUP-2XL)</b>	Bandwidth per slot	480 Gbps	480 Gbps	480 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2 (C9400X-SUP-2)</b>	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	1:1	1:1	1:1

**C9400-LC-48H**

**Cisco Catalyst 9400 Series Switch UPOE+ Line Card**

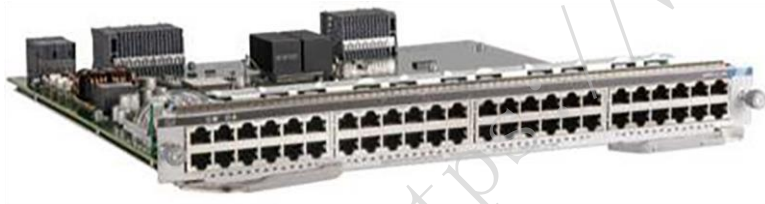

**Figure 4.** Cisco Catalyst 9400 Series 48-Port UPOE+ 10/100/1000 (RJ-45) Line Card (C9400-LC-48H)

The Catalyst 9400 Series switch UPOE+ line card supports Cisco UPOE+, Cisco UPOE, PoE+ and PoE. Designed for digital building and IoT applications, Cisco Catalyst 9400 Series IEEE 802.3bt compliant 90W UPOE+ line card provides data and power over a single cable to power devices like wireless access points, digital signage, security cameras, thermal cameras with PTZ features, LED lighting fixtures and large display screens. Cisco UPOE+ offers reduced cabling and installation costs without need for permits, device daisy-chaining applications that require higher power draw, uninterrupted power and data using dual supervisors, real-time device information and centralized management and remote control, faster and flexible device installation, where devices can be positioned in practical location instead of proximity to electrical outlets. Additionally these line cards provide advanced energy management through standards-based Energy Efficient Ethernet and lowest thermal dissipation per watt of energy sourced.

## Features


- 48 ports nonblocking
- 10/100/1000 module (RJ-45)
- Supported on Cisco IOS XE Software Release 16.12.1 or later
- Cisco UPOE+ is enabled, capable of up to 90W on all ports in the line card
- Energy Efficient Ethernet 802.3az
- IEEE 802.3bt/af/at and Cisco pre-standard PoE
- IEEE 802.1AE (MACsec-256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support up to 9216 bytes
- Ideal for campus and branch applications requiring enhanced performance for large file transfers and network backups

**Table 5.** Bandwidth per slot by chassis for C9400-LC-48H line card

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-1 (C9400-SUP-1)</b>	Bandwidth per slot	80 Gbps	80 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-1XL (C9400-SUP-1XL)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-1XL-Y (C9400-SUP-1XL-Y)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2XL (C9400X-SUP-2XL)</b>	Bandwidth per slot	480 Gbps	480 Gbps	480 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2 (C9400X-SUP-2)</b>	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	1:1	1:1	1:1

## C9400-LC-48U

### Cisco Catalyst 9400 Series Switch UPOE Line Card

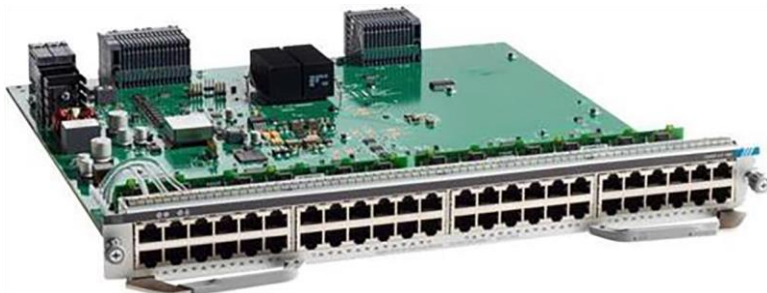

**Figure 5.**

Cisco Catalyst 9400 Series 48-Port UPOE 10/100/1000 (RJ-45) Line Card (C9400-LC-48U)

The Catalyst 9400 Series switch UPOE line card UPOE line card supports PoE, PoE+, and Cisco UPOE to deliver 15W, 30W, or 60W to the access point. 60W of inline power can power more devices—including IP phones, IPTVs, surveillance cameras, virtual desktop clients, and many others—without having to install extra wall or ceiling circuits while taking advantage of standards-based Energy Efficient Ethernet.

### Features

- 48 ports nonblocking
- 10/100/1000 module (RJ-45)
- Supported on Cisco IOS XE Software Release 16.6.1 or later
- Cisco UPOE is enabled, capable of up to 60W on all ports in the line card
- Energy Efficient Ethernet 802.3az
- IEEE 802.3af/at and Cisco pre-standard PoE
- IEEE 802.1AE (MACsec-256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support up to 9216 bytes
- Enterprise and commercial design to power next-generation IP phones, wireless base stations, video cameras, virtual desktop clients, and other PoE and Cisco UPOE devices
- Ideal for campus and branch applications requiring enhanced performance for large file transfers and network backups

**Table 6.** Bandwidth per slot by chassis for C9400-LC-48U line card

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-1 (C9400-SUP-1)</b>	Bandwidth per slot	80 Gbps	80 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-1XL (C9400-SUP-1XL)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-1XL-Y (C9400-SUP-1XL-Y)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2XL (C9400X-SUP-2XL)</b>	Bandwidth per slot	480 Gbps	480 Gbps	480 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2 (C9400X-SUP-2)</b>	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	1:1	1:1	1:1

## C9400-LC-48P

### Cisco Catalyst 9400 Series Switch PoE+ Line Card

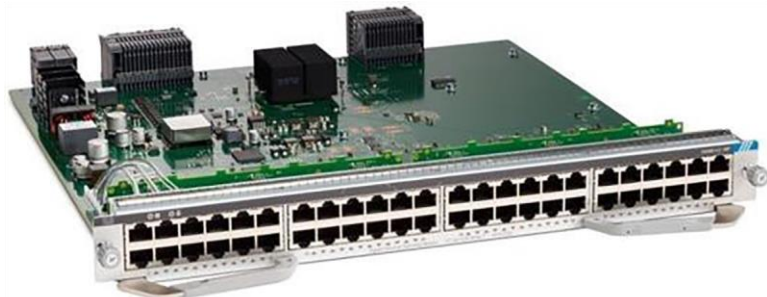


Figure 6.

Cisco Catalyst 9400 Series 48-Port PoE+ 10/100/1000 (RJ-45) Line Card (C9400-LC-48P)

#### Features

- 48 ports nonblocking
- 10/100/1000 module (RJ-45)
- Supported on Cisco IOS XE Software Release 16.8.1 or later
- PoE+ is enabled, capable of up to 30W on all ports in the line card
- Energy Efficient Ethernet 802.3az
- Supports IEEE 802.3af/at
- IEEE 802.1AE (MACsec-256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support up to 9216 bytes
- Enterprise and commercial design to power next-generation IP phones, wireless base stations, video cameras, virtual desktop clients, and other PoE
- Ideal for campus and branch applications requiring enhanced performance for large file transfers and network backups

Table 7. Bandwidth per slot by chassis for C9400-LC-48P line card

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-1 (C9400-SUP-1)</b>	Bandwidth per slot	80 Gbps	80 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-1XL (C9400-SUP-1XL)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-1XL-Y (C9400-SUP-1XL-Y)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2XL</b>	Bandwidth per slot	480 Gbps	480 Gbps	480 Gbps

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
(C9400X-SUP-2XL)	Oversubscription	1:1	1:1	1:1
C9400 Supervisor Engine-2 (C9400X-SUP-2)	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	1:1	1:1	1:1

## C9400-LC-48T

### Cisco Catalyst 9400 Series Switch RJ-45 Data Line Card



**Figure 7.**

Cisco Catalyst 9400 Series 48-Port 10/100/1000 (RJ-45) Line Card (C9400-LC-48T)

#### Features

- Supports up to 48 ports nonblocking
- 10/100/1000 module (RJ-45)
- Supported on Cisco IOS XE Software Release 16.6.1 or later
- Energy Efficient Ethernet 802.3az
- IEEE 802.1AE (MACsec-256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support up to 9216 bytes
- Enterprise and commercial design for data only user access
- Ideal for campus and branch applications requiring enhanced performance for large file transfers and network backups


**Table 8.** Bandwidth per slot by chassis for C9400-LC-48T line card

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
C9400 Supervisor Engine-1 (C9400-SUP-1)	Bandwidth per slot	80 Gbps	80 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
C9400 Supervisor Engine-1XL (C9400-SUP-1XL)	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-1XL-Y (C9400-SUP-1XL-Y)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2XL (C9400X-SUP-2XL)</b>	Bandwidth per slot	480 Gbps	480 Gbps	480 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2 (C9400X-SUP-2)</b>	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	1:1	1:1	1:1

## C9400-LC-48XS

### Cisco Catalyst 9400 Series Switch 48-port 10 Gigabit Ethernet Fiber Line Card

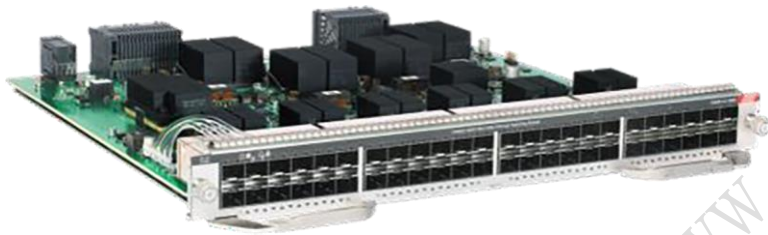

**Figure 8.**

Cisco Catalyst 9400 Series 48-port 10 Gigabit Ethernet (SFP+) Line Card (C9400-LC-48XS)

The Cisco Catalyst 9400 Series 48-port 10 Gigabit Ethernet line card can be deployed for high-performance and high-density 10 Gigabit Ethernet aggregations in the campus and in small to medium-sized networks as a core switch. The Cisco Catalyst 9400 Series 48-port 10 Gigabit Ethernet line card supports standard Small Form-Factor Pluggable Plus (SFP+) optics. The ports can be used interchangeably as Gigabit Ethernet and 10 Gigabit Ethernet to support phased migration from Gigabit Ethernet to 10 Gigabit Ethernet.

### Features


- Supports up to 48 ports of 10GE SFP+ or 48 Ports 1GE SFP
- SFP+ and SFP can be used simultaneously on the same line card without any restrictions
- Supported on Cisco IOS XE Software Release 17.8 or later
- IEEE 802.1AE (MACsec-256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support (up to 9216 bytes)
- Designed for enterprise backbone and collapsed access deployments

**Table 9.** Bandwidth per slot by chassis for C9400-LC-48XS line card

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-2XL (C9400X-SUP-2XL)</b>	Bandwidth per slot	480 Gbps	480 Gbps	480 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2 (C9400X-SUP-2)</b>	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	2:1	2:1	2:1

## C9400-LC-24XS

### Cisco Catalyst 9400 Series Switch 24-port 10 Gigabit Ethernet Fiber Line Card

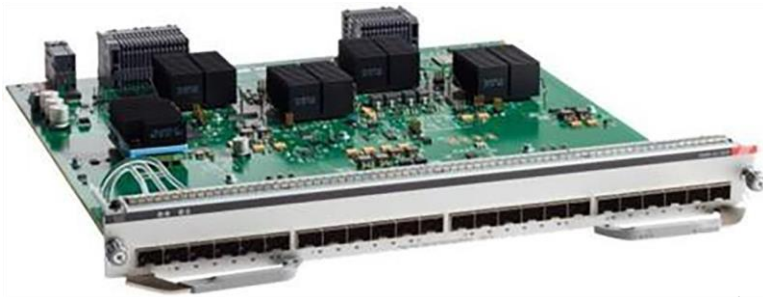

**Figure 9.**

Cisco Catalyst 9400 Series 24-port 10 Gigabit Ethernet (SFP+) Line Card (C9400-LC-24XS)

The Cisco Catalyst 9400 Series 24-port 10 Gigabit Ethernet line card can be deployed for high-performance and high-density 10 Gigabit Ethernet aggregations in the campus and in small to medium-sized networks as a core switch. The Cisco Catalyst 9400 Series 24-port 10 Gigabit Ethernet line card supports standard Small Form-Factor Pluggable Plus (SFP+) optics. The ports can be used interchangeably as Gigabit Ethernet and 10 Gigabit Ethernet to support phased migration from Gigabit Ethernet to 10 Gigabit Ethernet.

#### Features

- Supports up to 24 ports of 10GE SFP+ or 24 Ports 1GE SFP
- SFP+ and SFP can be used simultaneously on the same line card without any restrictions
- Supported on Cisco IOS XE Software Release 16.6.2 or later
- IEEE 802.1AE (MACsec-256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support (up to 9216 bytes)
- Designed for enterprise backbone and collapsed access deployments

**Table 10.** Bandwidth per slot by chassis for C9400-LC-24XS line card

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-1 (C9400-SUP-1)</b>	Bandwidth per slot	80 Gbps	80 Gbps	80 Gbps
	Oversubscription	3:1	3:1	3:1
<b>C9400 Supervisor Engine-1XL (C9400-SUP-1XL)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	2:1	3:1
<b>C9400 Supervisor Engine-1XL-Y (C9400-SUP-1XL-Y)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	2:1	3:1
<b>C9400 Supervisor Engine-2XL (C9400X-SUP-2XL)</b>	Bandwidth per slot	480 Gbps	480 Gbps	480 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2 (C9400X-SUP-2)</b>	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	1:1	1:1	1:1

## C9400-LC-48S

### Cisco Catalyst 9400 Series Switch 48-port 1 Gigabit Ethernet Fiber Line Card



**Figure 10.**  
Cisco Catalyst 9400 Series 48-port 1 Gigabit Ethernet (SFP) Line Card (C9400-LC-48S)

#### Features

- Supports up to 48 nonblocking SFP ports
- Supported on Cisco IOS XE Software Release 16.8.1 or later
- IEEE 802.1AE (MACsec-256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support (up to 9216 bytes)
- Enterprise, mid-market, and commercial core and distribution deployments requiring line-rate capability
- Service provider: Gigabit Ethernet aggregation for DSL Access Multiplexer (DSLAM), Passive Optical Network (PON), and mobile data backhaul; FTTX for residential and business applications
- Enterprise: Providing Fiber To The Desktop (FTTD), for deployments where non-blocking is mandatory requirement

---

**Table 11.** Bandwidth per slot by chassis for C9400-LC-48S line card

<https://www.jhj.cn>

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-1 (C9400-SUP-1)</b>	Bandwidth per slot	80 Gbps	80 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-1XL (C9400-SUP-1XL)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-1XL-Y (C9400-SUP-1XL-Y)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2XL (C9400X-SUP-2XL)</b>	Bandwidth per slot	480 Gbps	480 Gbps	480 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2 (C9400X-SUP-2)</b>	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	1:1	1:1	1:1

## C9400-LC-24S

### Cisco Catalyst 9400 Series Switch 24-port 1 Gigabit Ethernet Fiber Line Card



**Figure 11.**  
Cisco Catalyst 9400 Series 24-port 1 Gigabit Ethernet (SFP) Line Card (C9400-LC-24S)

#### Features

- Supports up to 24 nonblocking SFP ports
- Supported on Cisco IOS XE Software Release 16.8.1 or later
- IEEE 802.1AE (MACSEC 256) capability in hardware
- Layer 2 to Layer 4 Jumbo Frame support (up to 9216 bytes)
- Enterprise, mid-market, and commercial core and distribution deployments requiring line-rate capability
- Service provider: Gigabit Ethernet aggregation for DSL Access Multiplexer (DSLAM), Passive Optical Network (PON), and mobile data backhaul; FTTX for residential and business applications
- Enterprise: Providing Fiber To The Desktop (FTTD), for deployments where non-blocking is mandatory requirement

---

**Table 12.** Bandwidth per slot by chassis for C9400-LC-24S line card

<https://www.jhj.cn>

Supervisor		Chassis C9404R	Chassis C9407R	Chassis C9410R
<b>C9400 Supervisor Engine-1 (C9400-SUP-1)</b>	Bandwidth per slot	80 Gbps	80 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-1XL (C9400-SUP-1XL)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-1XL-Y (C9400-SUP-1XL-Y)</b>	Bandwidth per slot	240 Gbps	120 Gbps	80 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2XL (C9400X-SUP-2XL)</b>	Bandwidth per slot	480 Gbps	480 Gbps	480 Gbps
	Oversubscription	1:1	1:1	1:1
<b>C9400 Supervisor Engine-2 (C9400X-SUP-2)</b>	Bandwidth per slot	240 Gbps	240 Gbps	240 Gbps
	Oversubscription	1:1	1:1	1:1

## Power over Ethernet

Cisco Catalyst 9400 Series switches offer line cards, power supplies, and accessories required to deploy and operate standards-based Power over Ethernet, Power over Ethernet Plus (PoE/PoE+) and Cisco UPOE. PoE provides power over 100 m of standard Unshielded Twisted-Pair (UTP) cables when an IEEE 802.3af/at-compliant or Cisco pre-standard powered device is attached to the PoE/PoE+ and Cisco UPOE line card port. Instead of requiring wall power, attached devices such as IP phones, wireless base stations, video cameras, and other IEEE-compliant appliances can use power provided from the Cisco Catalyst 9400 Series UPOE line cards. This capability gives network administrators centralized control over power and eliminates the need to install outlets in ceilings and other out-of-the-way places where a powered device can be installed.

Although all references to -PoE/PoE+/UPOE, || -inline power, || and -voice|| power supplies and line cards are synonymous, there are currently four versions: Cisco pre-standard, IEEE 802.3af compliant, IEEE 802.3at compliant, and Cisco UPOE. Every Cisco Catalyst 9400 Series switch chassis and PoE power supply supports the IEEE 802.3af/at standard and the Cisco pre-standard power implementation, helping ensure backward compatibility with existing devices powered by Cisco. All IEEE 802.3af/at-compliant and Cisco UPOE line cards can distinguish an IEEE or Cisco pre-standard powered device from an unpowered Network Interface Card (NIC), helping ensure that power is applied only when an appropriate device is connected.

## Energy Efficient Ethernet

Energy Efficient Ethernet (EEE) is an IEEE 802.3az standard that is designed to reduce power consumption in Ethernet networks during idle periods.

EEE can be enabled on devices that support Low Power Idle (LPI) mode. Such devices can save power by entering LPI mode during periods of low utilization. In LPI mode, systems on both ends of the link can save power by shutting down certain services. EEE provides the protocol needed to transition into and out of LPI mode in a way that is transparent to upper layer protocols and applications.

---

## Features and benefits

### Functional transparency

Cisco Catalyst 9400 Series switches offer a line of modules that support numerous speeds and physical media combinations. These line cards are functionally transparent; all the packet processing, queuing, buffering and Quality of Service (QoS) occur in the supervisor engine. To that end line cards acquire the features and capabilities of the installed supervisor engine. The architecture let you easily upgrade all Ethernet line cards on your Cisco Catalyst 9400 Series switches to newer switching functions by adding a new supervisor engine. The simple design of the line cards results in a very high Mean Time Between Failures (MTBF), helping ensure high availability for a single connection to an end user.

### Modular versatility

Cisco Catalyst 9400 Series switches are a centralized architecture that is designed to provide dedicated wire-speed bandwidth to each line card slot within the chassis. Each line card has a dedicated bandwidth to the supervisor engine for packet processing. All network data that flows into Cisco Catalyst 9400 Series switches through the various line cards goes through the supervisor engine for processing, even in single-slot port-to-port communications.

A modular, centralized design allows you to use your investment in high-performance line cards across the entire line of Cisco Catalyst 9400 Series switch chassis and supervisor engines. With the centralized architecture of Cisco Catalyst 9400 Series switches, all line cards deployed in a chassis benefit from the enhanced features that the supervisor engine provides, including QoS; Layer 2, 3, and 4 routing; and hardware-based IPv6.

### Optics

Cisco Catalyst 9400 Series switch line cards provide a variety of optical port types and port speeds, including SFP+ and SFP. For details about the different optical modules supported by each line card and the minimum Cisco Software release required for each of the supported optical modules, visit <https://www.cisco.com/c/en/us/support/interfaces-modules/transceiver-modules/products-device-support-tables-list.html>.

## Product specifications

### Standards, technologies, environmental, and other line card features

Table 13 lists additional line card product specifications.

**Table 13.** Product specifications

Feature	Description
<b>Standards</b>	<ul style="list-style-type: none"><li>• Gigabit Ethernet: IEEE 802.3z, IEEE 802.3x, IEEE 802.3ab, IEEE 802.3bt, IEEE 802.3at, IEEE 802.3af, IEEE 802.3az, IEEE 802.3bz, IEEE 802.3an, IEEE 802.3an</li></ul>
<b>EtherChannel technology</b>	<ul style="list-style-type: none"><li>• Gigabit EtherChannel: All 1000 Mbps ports</li><li>• 10 Gigabit EtherChannel: All 10Gbps ports</li><li>• IEEE 802.3ad (Link Aggregation Control Protocol)</li><li>• Port Aggregation Protocol (PaGP): Yes</li><li>• Number of ports per tuple: 16 with LACP and 8 with PaGP</li><li>• EtherChannel and IEEE 802.3ad technology across line cards: Yes</li></ul>
<b>Physical dimensions</b>	<ul style="list-style-type: none"><li>• Occupies one slot in Cisco Catalyst 9400 Series switches</li><li>• Dimensions (H x W x D): 1.6 x 14.92 x 14.57 in. (4.06 x 37.90 x 37.00 cm)</li></ul>
<b>Environmental conditions</b>	<ul style="list-style-type: none"><li>• Operating temperature:</li><li>• Normal Operating* Temperature and Altitudes:<ul style="list-style-type: none"><li>◦ 23° to 113° F (-5 to +45° C), up to 6,000 feet (1800 m)</li><li>◦ 23° to 104° F (-5 to +40° C), up to 10,000 feet (3000 m)</li><li>◦ *Minimum ambient temperature for cold startup is 0° C</li></ul></li><li>• Short-Term** Exceptional Conditions:<ul style="list-style-type: none"><li>◦ 23° to 131° F (-5 to +55° C), up to 6,000 feet (1800 m)</li><li>◦ 23° to 122° F (-5 to +50° C), up to 10,000 feet (3000 m)</li><li>◦ **Not more than following in one-year period: 96 consecutive hours, or 360 hours total, or 15 occurrences</li></ul></li><li>• Storage temperature: -40° to 158° F (-40° to 70° C)</li><li>• Relative humidity: 10 to 95%, noncondensing</li><li>• Operating altitude: -60 to 3000m</li></ul>
<b>Safety conditions</b>	Fiber optic lasers: Class 1 laser products
<b>Safety certifications</b>	<ul style="list-style-type: none"><li>• UL 60950-1</li><li>• CAN/CSA-C222.2 No. 60950-1</li><li>• EN 60950-1</li><li>• IEC 60950-1</li><li>• AS/NZS 60950.1</li><li>• IEEE 802.3</li></ul>

Feature	Description
<b>Electromagnetic emissions certifications</b>	<ul style="list-style-type: none"> <li>• 47 CFR Part 15</li> <li>• CISPR22 Class A</li> <li>• EN 300 386 V1.6.1</li> <li>• EN 55022 Class A</li> <li>• EN 55032 Class A</li> <li>• CISPR 32 Class A</li> <li>• EN61000-3-2</li> <li>• EN61000-3-3</li> <li>• ICES-003 Class A</li> <li>• TCVN 7189 Class A</li> <li>• V-3 Class A</li> <li>• CISPR24</li> <li>• EN 300 386</li> <li>• EN55024</li> <li>• TCVN 7317</li> </ul>
<b>ROHS compliance</b>	ROHS5

## Power and MTBF information

Table 14 gives power and MTBF information for different line cards.

**Table 14.** Power and MTBF information

Part number	Max rated power (W)	Rated MTBF (hours)
C9400-LC-48HX	270	
C9400-LC-48HN	175	
C9400-LC-48H	65	874,140
C9400-LC-48U	65	915,150
C9400-LC-48T	65	1,214,080
C9400-LC-48XS	250	
C9400-LC-24XS	200	545,080
C9400-LC-48UX	240	469,550
C9400-LC-48P	65	980,440

Part number	Max rated power (W)	Rated MTBF (hours)
C9400-LC-24S	120	1,104,470
C9400-LC-48S	170	937,600

**Note:** All power numbers shown in Table 3 are maximum values recommended for facility power and cooling capacity planning. These figures are not indicative of the actual power draw during operation. Typical power draw is about 40%-75% maximum rated power value shown.

Refer to the Cisco Power Calculator for more details: <https://cpc.cloudapps.cisco.com/cpc/DS.cpc>.

## Ordering information

To place an order, visit the Cisco Ordering homepage.

Table 15 details ordering information.

**Table 15.** Ordering information

Part number ("=" Indicates "Spare")	Product name
C9400-LC-48HX (=)	Cisco Catalyst 9400 Series 48-Port UPOE+ 10G multigigabit (RJ-45)
C9400-LC-48HN (=)	Cisco Catalyst 9400 Series 48-Port UPOE+ 5G multigigabit (RJ-45)
C9400-LC-48H-UL (=)	Cisco Catalyst 9400 Series 48-Port UPOE+ 10/100/1000 (RJ-45) (Compatible with UL1069 Standard)
C9400-LC-48H (=)	Cisco Catalyst 9400 Series 48-Port UPOE+ 10/100/1000 (RJ-45)
C9400-LC-48U (=)	Cisco Catalyst 9400 Series 48-Port UPOE 10/100/1000 (RJ-45)
C9400-LC-48T (=)	Cisco Catalyst 9400 Series 48-Port 10/100/1000 (RJ-45)
C9400-LC-48XS (=)	Cisco Catalyst 9400 Series 48-Port 10 Gigabit Ethernet (SFP+)
C9400-LC-24XS (=)	Cisco Catalyst 9400 Series 24-Port 10 Gigabit Ethernet (SFP+)
C9400-LC-48UX (=)	Cisco Catalyst 9400 Series 48-Port UPOE w/ 24p mGig 24p RJ-45
C9400-LC-48P (=)	Cisco Catalyst 9400 Series 48-Port POE+ 10/100/1000 (RJ-45)
C9400-LC-24S (=)	Cisco Catalyst 9400 Series 24-Port Gigabit Ethernet (SFP)
C9400-LC-48S (=)	Cisco Catalyst 9400 Series 48-Port Gigabit Ethernet (SFP)

## Warranty

### Cisco Enhanced Limited Lifetime Hardware Warranty

Cisco Catalyst 9400 Series switches come with a Cisco Enhanced Limited Lifetime Warranty (E-LLW) that includes Next-Business-Day (NBD) delivery of replacement hardware where available and 90 days of 8x5 Cisco Technical Assistance Center (TAC) support.

Your formal warranty statement, including the warranty applicable to Cisco software, appears in the information packet that accompanies your Cisco product. We encourage you to review the warranty statement shipped with your specific product carefully before use.

Cisco reserves the right to refund the purchase price as its exclusive warranty remedy.

For further information about warranty terms, visit <https://www.cisco.com/go/warranty>.

Table 16 provides information about the E-LLW.

**Table 16.** E-LLW details

	Cisco E-LLW
<b>Devices covered</b>	Applies to Cisco Catalyst 9400 Series switches.
<b>Warranty duration</b>	As long as the original customer owns the product.
<b>End-of-life policy</b>	In the event of discontinuance of product manufacture, Cisco warranty support is limited to 5 years from the announcement of discontinuance.
<b>Hardware replacement</b>	Cisco or its service center will use commercially reasonable efforts to ship a replacement for NBD delivery, where available. Otherwise, a replacement will be shipped within 10 working days after receipt of the Return Materials Authorization (RMA) request. Actual delivery times might vary depending on customer location.
<b>Effective date</b>	Hardware warranty commences from the date of shipment to customer (and in case of resale by a Cisco reseller, not more than 90 days after original shipment by Cisco).
<b>TAC support</b>	Cisco will provide during business hours, 8 hours per day, 5 days per week, basic configuration, diagnosis, and troubleshooting of device-level problems for up to a 90-day period from the date of shipment of the originally purchased Cisco Catalyst 9400 Series product. This support does not include solution or network-level support beyond the specific device under consideration.
<b>Cisco.com access</b>	Warranty allows guest access only to Cisco.com.

## Cisco Services

Achieve infrastructure excellence faster and with less risk. Cisco Catalyst 9000 Services provide expert guidance to help you successfully deploy, manage, and support the new Catalyst 9000 switching family. With unmatched networking expertise, best practices, and innovative tools, we can help you reduce overall upgrade, refresh, and migration costs as you introduce new hardware, software and protocols into the network. Offering a comprehensive lifecycle of services – from implementation, optimization, technical and managed services – Cisco experts help you minimize disruption and achieve operational excellence to extract maximum value from your Cisco DNA-ready infrastructure. Learn more about [Cisco Services for Enterprise Networks](#).

## Product sustainability

Information about Cisco's environmental, social and governance (ESG) initiatives and performance is provided in Cisco's CSR and sustainability [reporting](#).

**Table 17.** Cisco Environmental Sustainability Information

Sustainability Topic		Reference
<b>General</b>	Information on product-material-content laws and regulations	<a href="#">Materials</a>
	Information on electronic waste laws and regulations, including our products, batteries and packaging	<a href="#">WEEE Compliance</a>
	Sustainability Inquiries	Contact: <a href="mailto:csr_inquiries@cisco.com">csr_inquiries@cisco.com</a>
	Information on product takeback and reuse program	<a href="#">Cisco Takeback and Reuse Program</a>
	Environmental Operating Conditions	<a href="#">Table 2: Product specifications</a>
	Regulatory and compliance	<a href="#">Table 2: Product specifications</a>
	Mean Time Between Failures - MTBF (hours)	<a href="#">Table 3: Power and MTBF information</a>
	Cisco Enhanced Limited Lifetime Hardware Warranty	<a href="#">Table 5: E-LLW details</a>
<b>Power</b>	Power	<a href="#">Table 3: Power and MTBF information</a>
<b>Material</b>	Product packaging weight and materials	Contact: <a href="mailto:environment@cisco.com">environment@cisco.com</a>
	Physical Dimensions	<a href="#">Table 2: Product specifications</a>

## Cisco Capital

### Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more](#).

## Document history

New or Revised Topic	Described In	Date
Added New 10G mGig UPOE+ Line card (C9400-LC-48HX) Added New 10G SFP+ Line card (C9400-LC-48XS)	<a href="#">New Section</a>	02/03/22
Added New UPOE+ Line card (C9400-LC-48HN) Added Product Sustainability	<a href="#">New Section</a>	03/08/21
Added New UPOE+ Line card (C9400-LC-48H)	<a href="#">New Section</a>	08/20/19

<https://www.jhj.cn>

**Americas Headquarters**  
Cisco Systems, Inc.  
San Jose, CA

**Asia Pacific Headquarters**  
Cisco Systems (USA) Pte. Ltd.  
Singapore

**Europe Headquarters**  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)